




G1020 Greca Polycarbonate Panel

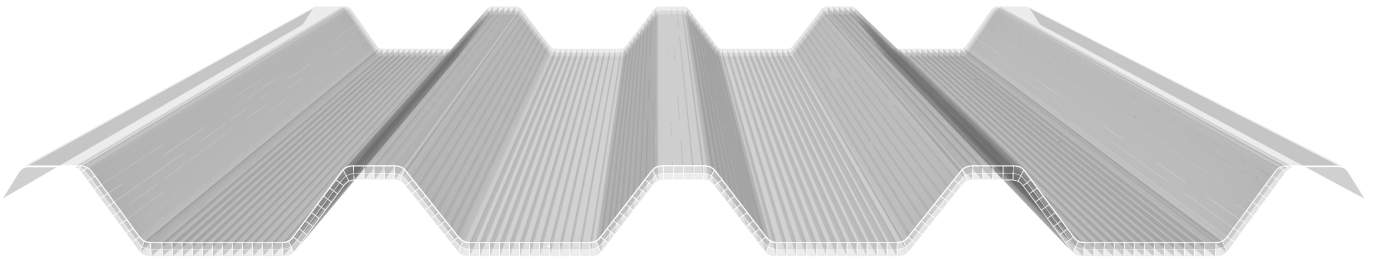

- Precise compatibility with any thickness of Nova Series sandwich panels. This compatibility provides fast and easy assembly.
- The corrugated form provides high load capacity.
- Visual harmony achieved with corrugated form like the Nova Series sandwich panels.
- Provides high waterproofing and thermal insulation when installed with sandwich panels.
- Suitable for every roof slope where sandwich panels can be installed.
- High heat resistance.
- High UV resistance.
- High shock resistance.
- Produced transparent or opaque for different light requirements.
- Can be produced in every length according to architectural requirements and transportation.

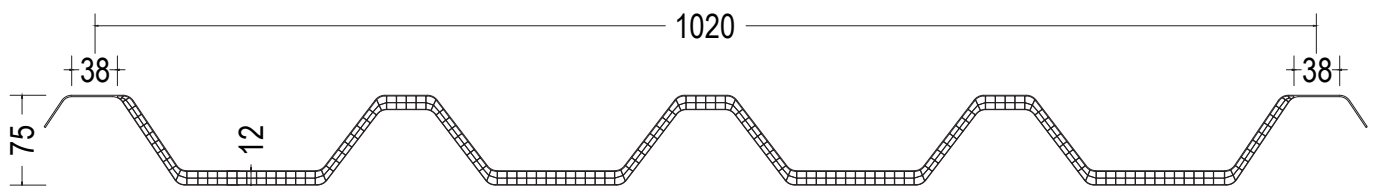

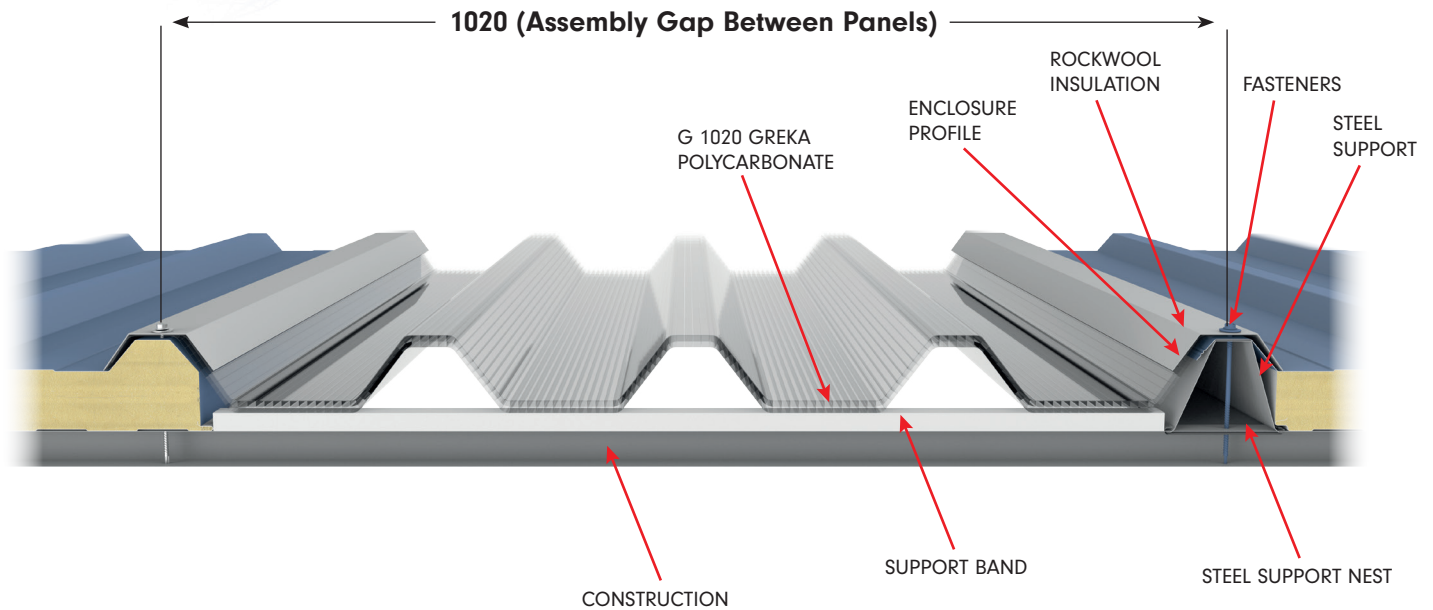

Thickness	12 mm
Net Coverage Width	1020 mm
Assembly Gap Between Panels	1020 mm
Length	Min 100 mm,
Max. Depending on Transport and Assembly Conditions	2,30 W/m ² K
Heat Transmission	2,30 W/m ² K
Coefficient of Thermal Expansion	0,065 mm/m°C
Light Transmittance	Transparent 72%, Opaque 55%
Temperature Resistance	-40 °C/ + 120 °C

