




P1000 Plain Polycarbonate Panel

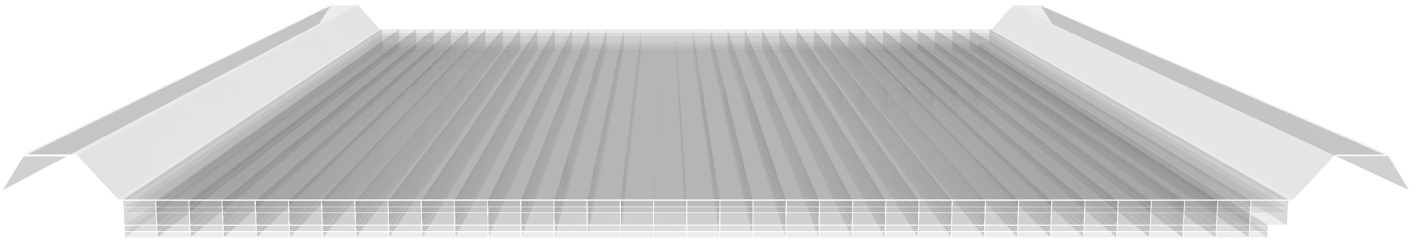

- Precisely compatible with any wide pitch roof sandwich panels. This compatibility provides fast and easy assembly.
- Provides high waterproofing and thermal insulation when installed with sandwich panels.
- Suitable for every roof slope where sandwich panels can be installed.
- If roof sandwich panels are applied to the exterior they can be used on the exterior.
- High heat resistance.
- High UV resistance.
- High shock resistance.
- Produced transparent or opaque for different light requirements
- Can be produced in every length according to architectural requirements and transportation conditions.

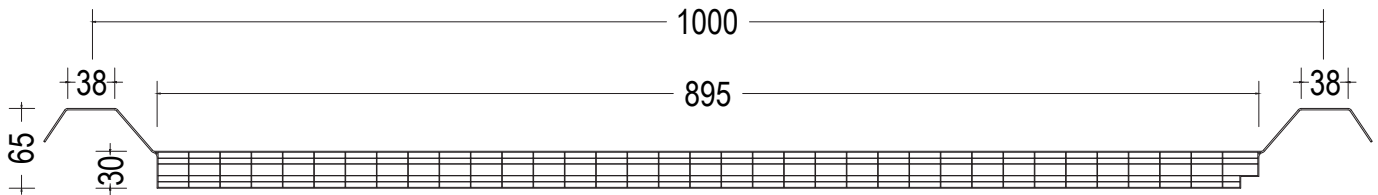

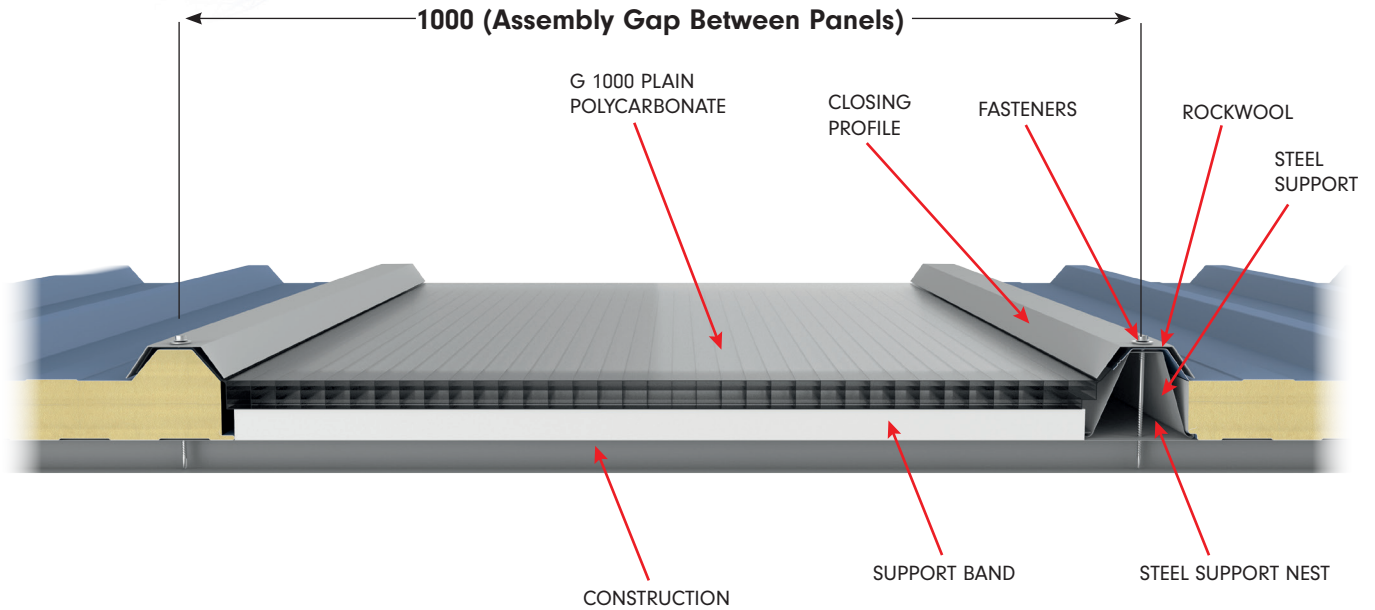

Thickness	30 mm
Net Coverage Width	1000 mm
Assembly Gap Between Panels	1000 mm
Length	Min 100 mm,
Max. Depends on transportation and installation conditions	2,30 W/m ² K
Heat Transmission	1,35 W/m ² K
Coefficient of Thermal Expansion	0,065 mm/m°C
Light Transmittance	Transparent 59%, Opaque 30%
Temperature Resistance	-40 °C/ + 120 °C

