


THE FIRST
AND ONLY
IN TURKEY


 **AssanPanel**

WE BRIGHTEN
THE PANEL MARKET


MultiLight

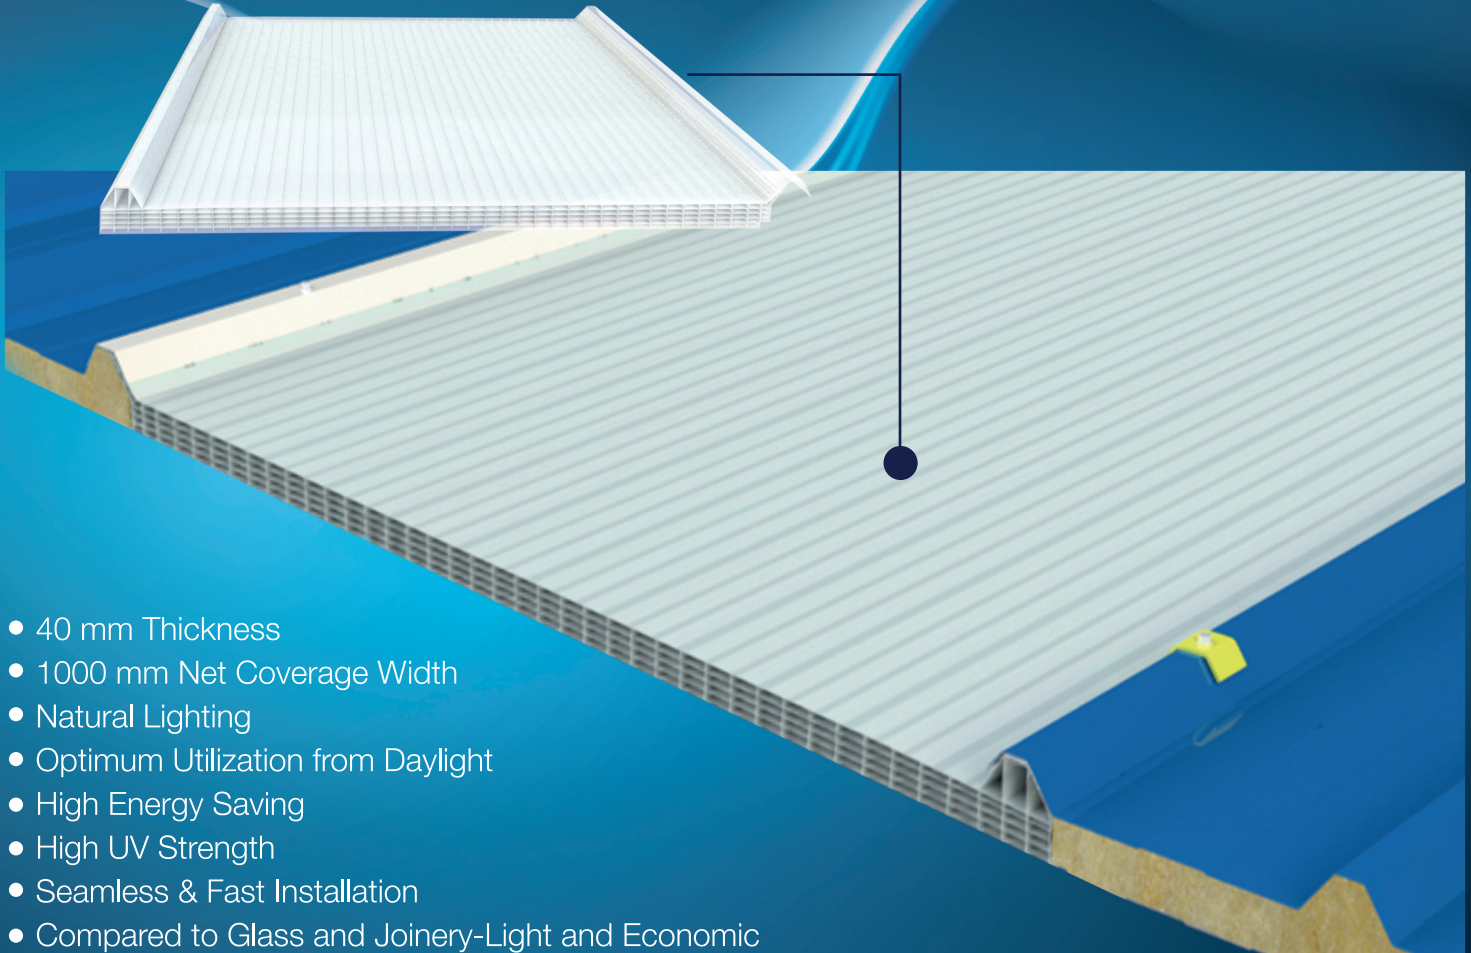

- 40 mm Thickness
- 1000 mm Net Coverage Width
- Natural Lighting
- Optimum Utilization from Daylight
- High Energy Saving
- High UV Strength
- Seamless & Fast Installation
- Compared to Glass and Joinery-Light and Economic




- Support System without Profile

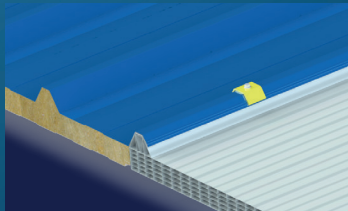

- Suitable for Constant Application



- Net Coverage Model


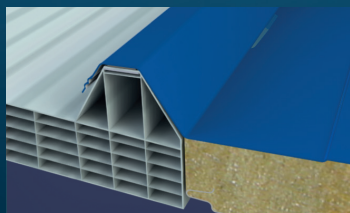


- Extra Steel



- Temperature Resistance
B.S1.d0-B Roof

MultiLight

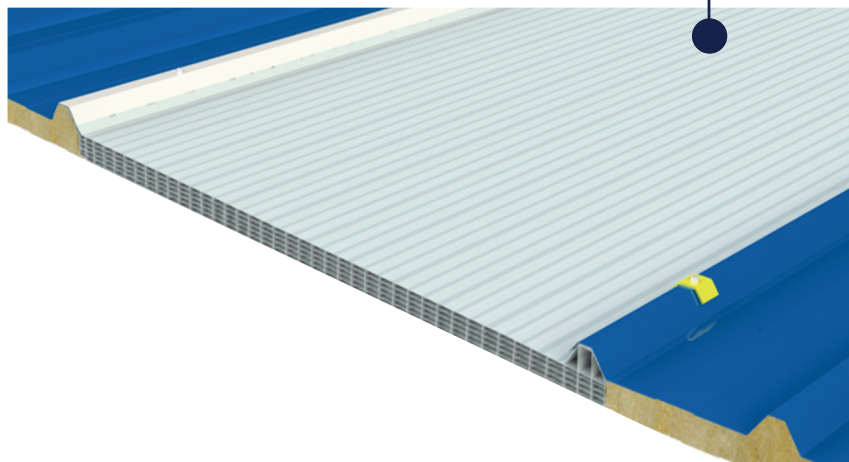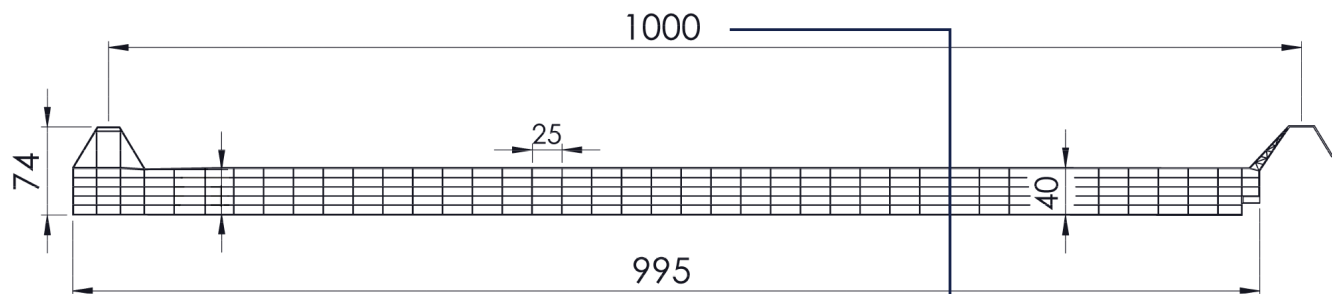

Thickness	Net Coverage Width	Assembly Gap Between Sandwich Panels	Thermal Conductivity Coefficient
40 mm \pm 2mm	1000 mm	1000 mm	1,15 W/m ² K

Thermal Expansion Coefficient	Light Expansion Coefficient	Temperature Strenght
0,065 mm/mm °C	Transparent 59% Opaque 30%	-40 °C / \pm 120 °C